


## Achieving correct ESD protection for CAN FD

Connectivity, autonomous driving, and electrification are driving the evolution of automotive wiring harnesses. This results in a growing demand for high-speed data transmission and bandwidth required for ADAS. All of these must be protected from ESD spikes and surges.

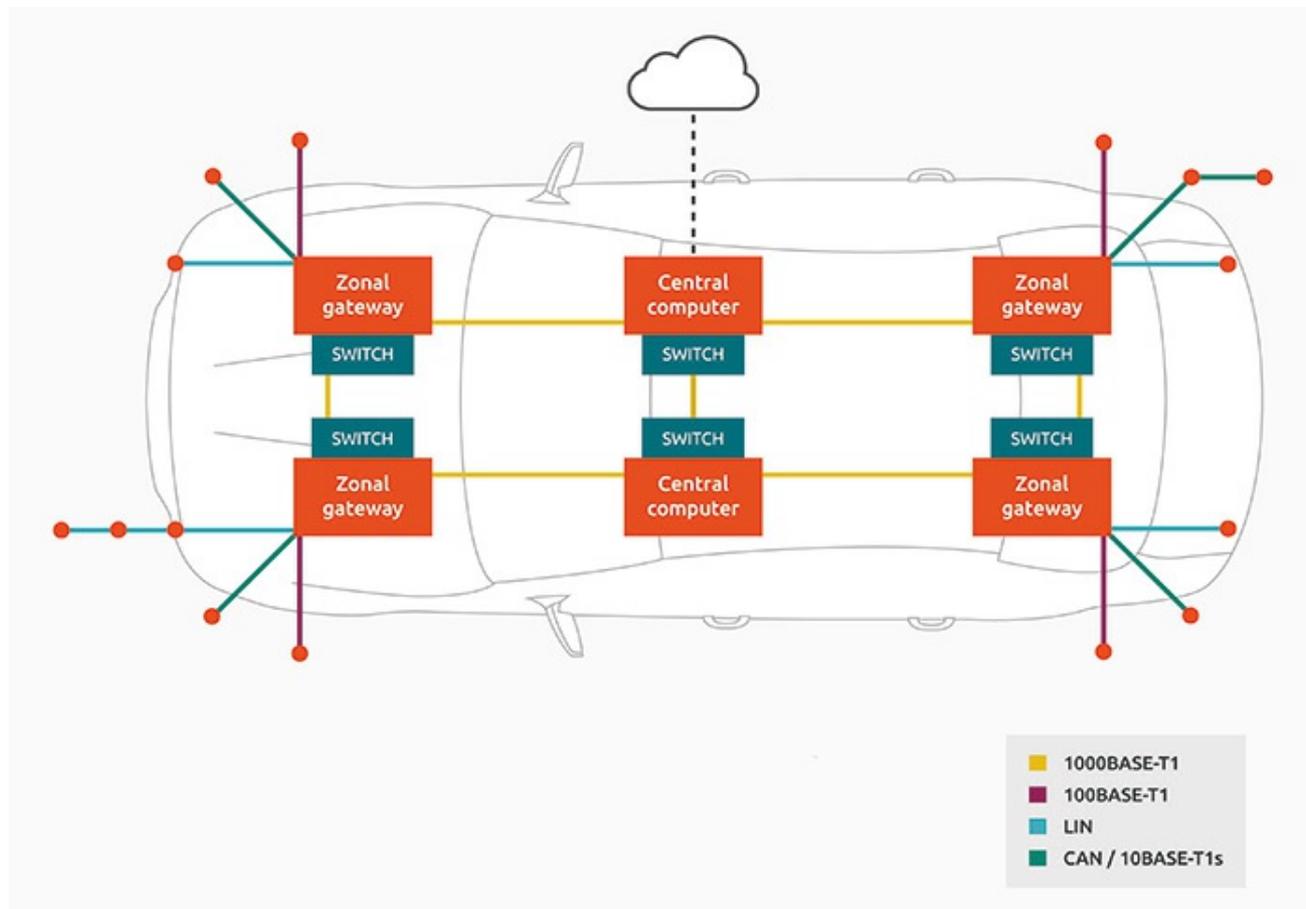

Zonal architecture of in-vehicle network (Source: Nexperia)


The [complete article](#) is published in the [December issue](#) of the CAN Newsletter magazine 2021. This is just an excerpt.

Expectations surrounding travel and human interaction with vehicles are changing dramatically. The megatrends of increased connectivity, autonomous driving, and electrification are driving the evolution of automotive wiring harnesses and fueling the growing demand for high-speed data transmission and bandwidth required for advanced driver-assistance systems (ADAS). Protection of ESD (electrostatic discharge) spikes and surges is essential.

Traditional wiring looms and in-vehicle networks have been undergoing a significant transformation. The classic flat architecture wiring harness is changing to a domain and zonal architecture (Photo 1) with Automotive Ethernet as the backbone. However, peripheral buses still need to transmit more data, so new versions of existing protocols are finding their way into vehicle networks. The CAN network is synonymous with in-vehicle networks but was limited to 1 Mbit/s until the launch of CAN FD, which covers speeds up to 12 Mbit/s and offers critical advantages necessary for future ADAS (advanced driver assistance systems) applications.

2 Mbit/s is the typical implementation limit suitable for many applications that do not require higher data rates. CAN FD uses the same differential signal levels as Classical CAN. The increased data rate is achieved by shortening the dominant and recessive states of a 'send' frame. This technique increases the requirements on the physical layer and, as systems become more sensitive with regards to EMC (electromagnetic compatibility) and ESD, this requires additional, discrete ESD protection to improve system ESD robustness to a reliably acceptable level.

Besides OEM (original equipment manufacturer) car makers' requirements, ESD protection devices must fulfil automotive industry standards such as IEC 61000-4-2 and ISO 10605. For Classical CAN and CAN FD, ESD devices must be short-to-battery and jumpstart robust according to ISO 16750-2 (26 V) or internal norms (28 V). Compliance with IEC 62228-3 in combination with a CAN transceiver (emission, immunity: DPI, pulses, ESD) is also necessary. In addition, common requirements for CAN are diode

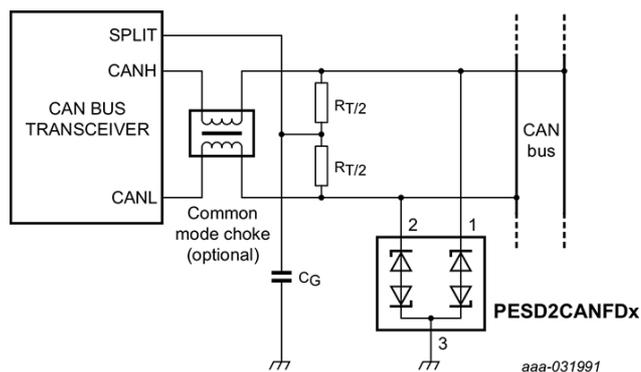

Circuit diagram showing Nexperia's improved PESD2CANFDx ESD protection diode in a CAN FD application (Source: Nexperia)

capacitance of 17 pF to 30 pF and for CAN FD 6 pF to 10 pF, as the data speed is greater and signal integrity, as well as capacitance matching are more critical. Therefore, Nexperia has improved its IVN ESD protection diode product range and developed a new generation tailored to CAN FD requirements. The new PESD2CANFDx series comes in different voltage, capacitance, and packages configurations while being twofold AEC-Q101 qualified.

*If you would like to read the full article, you can [download](#) it free of charge or you [download the entire magazine](#).*

[CW](#)